




STRAW BEING BLOWN ON FIELD TO STOP WIND EROSION & or COVER CROP



WIDE, EVEN SPREADING OF MATERIAL, 50 FEET OR MORE (DEPENDING ON MATERIAL & WIND)



CONTROLLING DISCHARGE INTO A NARROW STRIP, SUCH AS FILLING WHEEL RUTS

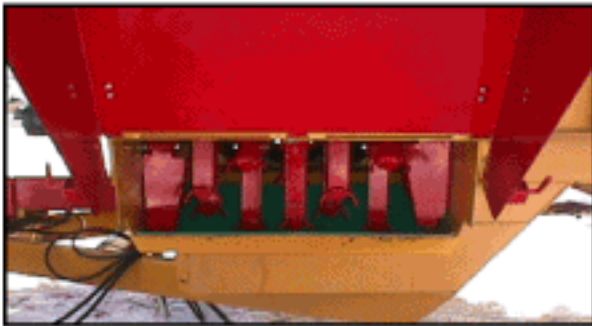

VIEW OF FLAILS AND AIR BOOSTER BLADES



CONTROL HOOD IN RAISED POSITION FOR SPREADING



TWIN HYDRAULIC CYLINDERS USED TO RAISE BLOWER AWAY FROM DISCHARGE AUGER IF PLUGGING STARTS



CONTROL HOOD IN DOWN POSITION THAT IS ADJUSTABLE TO DIRECT MATERIAL IN DESIRED LOCATION



RAISED FULLY TO ALLOW MATERIAL TO DISCHARGE WITHOUT REMOVING THE BLOWER. USED FOR BUNKER FEEDING OR DISCHARGING MATERIAL ON THE GROUND

NEWHOUSE BLOWER ATTACHMENT FOR C5000 BALE CHOPPER