

NEWHOUSE


PORTABLE BALE ELEVATOR

* Constructed of light weight, high tensile strength square tubing!

* 80% Stronger than round tubing by test!

* This elevator is built to last!

*Industrial rated!

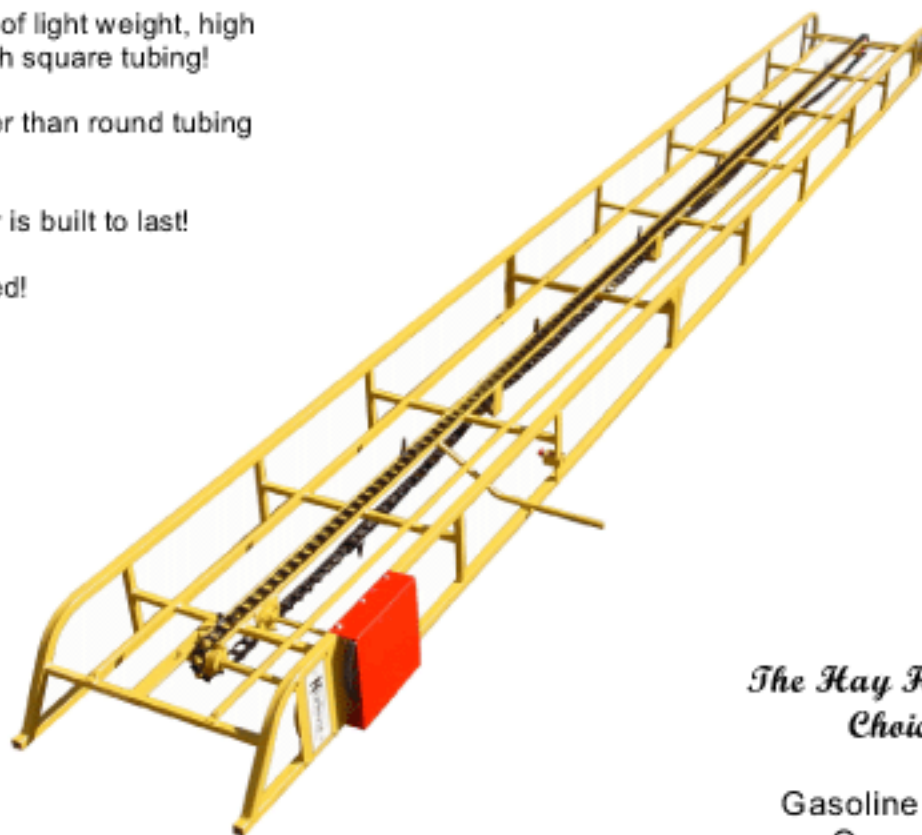

*The Hay Haulers
Choice*

Gasoline
Or
Electric powered

Standard lengths– 16, 18, and 20 feet
Add sections as needed to increase length

= NEWHOUSE =
Mfg. Co. Inc. - Redmond, OR

1048 N. Sixth street – Redmond, OR 97756

Phone 541-548-1055 Fax 541-548-4144


Web site: www.newhouse-mfg.com

e-mail: info@newhouse-mfg.com

NEWHOUSE

ALL SQUARE TUBING ELEVATOR

Years of engineering and field testing have been acquired to make it the trouble free elevator, and the hay haulers choice!

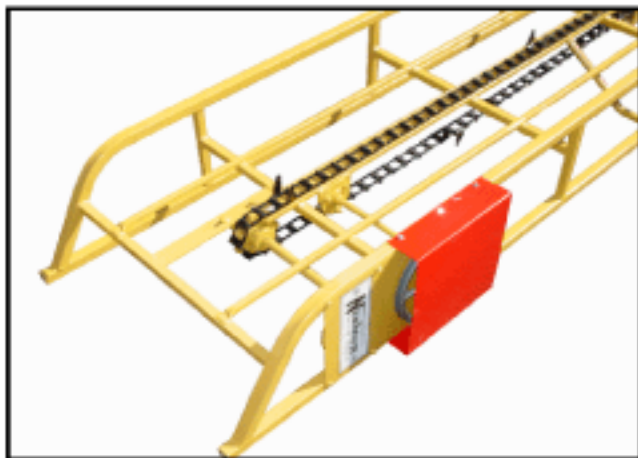


CARRIER CHAIN RAIL...

The chain rail is the first part to wear out due to weight of bales on the chain. Newhouse more than doubled the rail thickness increasing the life several times.

EXTENSIONS...

We also make two, four, and six foot extensions that bolt quickly into place for more convenience.

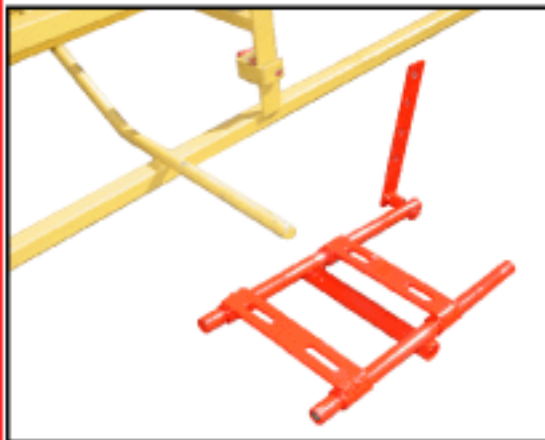

MOTOR LEVELER...

Easy-to-remove motor mount has a fast leveling device to keep the motor level. It also has an automatic spring belt tensioner. There are no bolts or nuts to remove to adjust the motor base, only one spring loaded pin to pull which removes or adjusts the motor base quickly.

SPECIFICATIONS

LENGTH	COMPOSITION	TWO TIE BALES APPROX. WT.	THREE TIE BALES APPROX. WT.
16 FEET	8 ft lower section 8 ft upper section	130 lbs	
18 FEET	8 ft lower section 10 ft upper section	146 lbs	
20 FEET	8 ft lower section 12 ft upper section	162 lbs	168 lbs
Extensions-2 ft, 4 ft, and 6 ft		8 lbs per foot	8.5 lbs per foot
Width inside clearance		22 INCHES	25 INCHES
Carrier chain		No. 45	No. 55
Height is 11 inches. All lifetime sealed bearings throughout			

DEALER STAMP

