

= Newhouse =

GARLIC BOX FIELD LOADER

MOST EFFICIENT WAY TO GO, LESS LABOR AND LESS TIME



MODEL GBFL-

ALL HYDRAULIC DRIVEN BY A HEAVY DUTY PTO PUMP

NEWHOUSE MFG. CO., INC.


1048 N. 6th STREET REDMOND, OR 97756

PHONE (541) 548-1055 FAX (541) 548-4144

Web Site: www.newhouse-mfg.com

E-mail: info@newhouse-mfg.com

NEWHOUSE GARLIC BOX FIELD LOADER

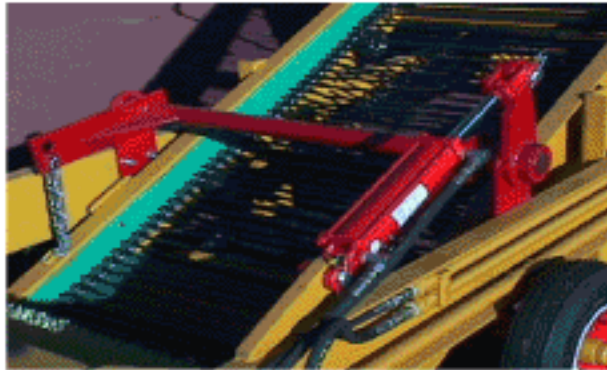

HYDRAULIC STEERING RUNNING GEAR IS CONTROLLED FROM THE TRACTOR FOR A CLOSER TURNING RADIUS OR RUNNING ALIGNMENT.



HEAVY DUTY ADJUSTABLE SWEEP ARMS



SIDE VIEW WITH HINGED EMPTY BOX PLATFORMS IN TRANSPORTING POSITION



HYDRAULIC OPERATED BLADE LIFTER IS CONTROLLED FROM THE TRACTOR.



ADJUSTABLE DEPTH WHEELS WITH 8:40 PNEUMATIC TIRES


WILL GREATLY INCREASE YOUR PROFITS



ALL WHITE PAINTED STEEL CANOPY FOR COOLNESS AND COMFORT FOR WORKERS.




THIS REAR VIEW SHOWS THREE TOTE BOXES, THE OUTER TWO ARE THE EMPTIES. CENTER PLATFORM WILL LOWER FULL BOX TO THE GROUND WHEN FULL.

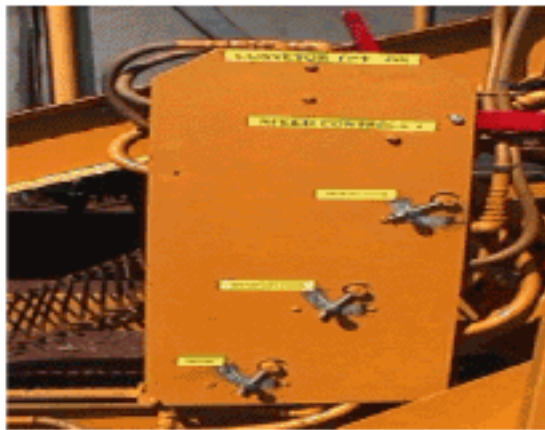

SPEED CONTROLS ARE AT ONE LOCATION FOR YOUR CONVENIENCE .

- ROLLER BRUSH SPEED CONTROL
- PRIMARY CHAIN SPEED CONTROL
- SECONDARY CHAIN CONTROL

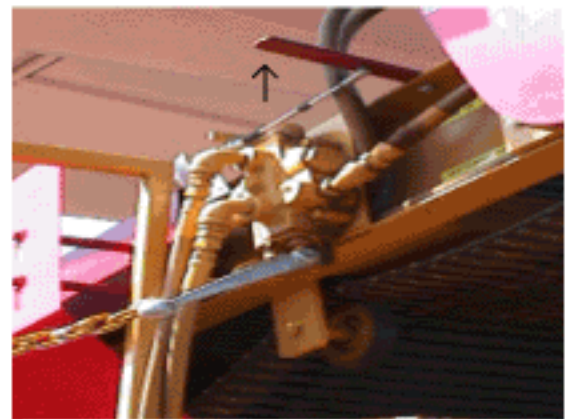

REMOTE START/STOP SORTING CONVEYER CONTROL LEVERS ARE LOCATED AT EACH END OF THE SORTING TABLE.



NO SLIP CAT WALKS AND STEPS WITH SAFETY RAILS.



THIS HANDLE CONTROLS THE LOWERING AND RAISING OF THE FILLED BOX PLATFORM AND PUSH-OFF. NOTE! WILL NOT FUNCTION IF CONVEYORS ARE IN MOTION, THUS PREVENTING GARLIC FROM FALLING OFF THE CONVEYOR AND TO THE GROUND.



ADJUSTABLE SPEED ROLLER
STYLE BRUSH GENTLY ASSIST
GARLIC ON TO THE ELEVATOR.



SORTING TABLE – BELTED RUBBER
COVERED CHAIN FOR A QUIETER AND
MORE ENJOYABLE WORK ENVIRON-
MENT.



A CLOSE-UP VIEW OF THE HINGED
PLATFORM AND PUSH-OFF IN THE
UNLOADING POSITION.



P.T.O. PUMP MOUNTED DIRECTLY TO
TRACTOR PTO. HOSES ARE SUS-
PENDED BY A SPRING LOADED POGO



THIS FRONT VIEW SHOWS LARGE HYDRAULIC PUMP HOSES
WHICH ARE SUSPENDED BY A SPRING LOADED POGO STICK.
ALSO SHOWN IS AN ADJUSTABLE CATEGORY 3 HITCH.

SPECIFICATIONS

TIRES	_____
2,9:00/20	
HYDRAULIC RESERVOIR	_____ 50
GAL	
HYDRAULIC PUMP, PTO	_____ 1000 RPM, 23
GAL	
PRIMARY CHAIN	_____ 7/16" X
30"	
SECONDARY CHAIN	_____ RUBBER COVERED
BELTED	

NEWHOUSE
MANUFACTURING CO.

1048 N. SIXTH STREET
HWY. 97 AT THE NORTH Y
REDMOND, OR 97756