

= Newhouse =

Mfg. Co. Inc. - Redmond, OR


HEAVY DUTY 12, 17, & 20 FT.
SHREDDER FOR POTATOES, STUBBLE, VINES, ETC.
MODELS: P1200, P1700, & P1950
EXTRA REINFORCEMENT WHERE NEEDED



3-POINT FLOATING HITCH



1000 RPM PTO WITH
OVER RUNNING CLUTCH

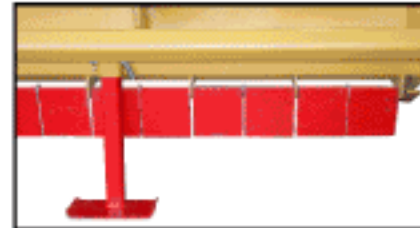

NEW IMPROVED DEBRIS DEFLECTOR
FOR INDEPENDENT HINGED
SAFETY FLAPPERS.
2 JACK STANDS FOR STORAGE AND FOR
SAFETY PURPOSES WHEN WORKING ON
SHREDDER


NEWHOUSE MANUFACTURING COMPANY INC.
1048 N. SIXTH STREET, REDMOND, OR 97756
PHONE: (541) 548-1055 FAX: (541) 548-4144
WEB SITE: www.newhouse-mfg.com
E-mail: info@newhouse-mfg.com



Another Added Feature - Front tool bar for clamping other accessories such as depth wheels, shovels, coulters, etc.



Rigid Adjustable Wheel Leg - Height Adjustment is made easy with a simple screw jack.

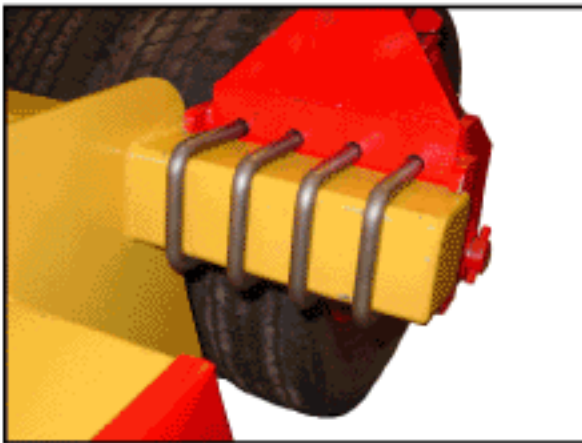


ADDED FEATURE, REQUESTED BY POTATO GROWERS

The rear tool bar extension is extended past the side walls so the tire roller can be wider than the inner sides of the housing.



Swivel Wheels - The 360 degree swivel capability allows for easy turning, either forward or reverse, without lifting the shredder. This option is excellent for use in contoured land or with short head lands.

Tough Steel Construction - Every part is built to withstand years of hard work. The shredder hood is constructed of 1/4" steel for long life, durability, and safety.

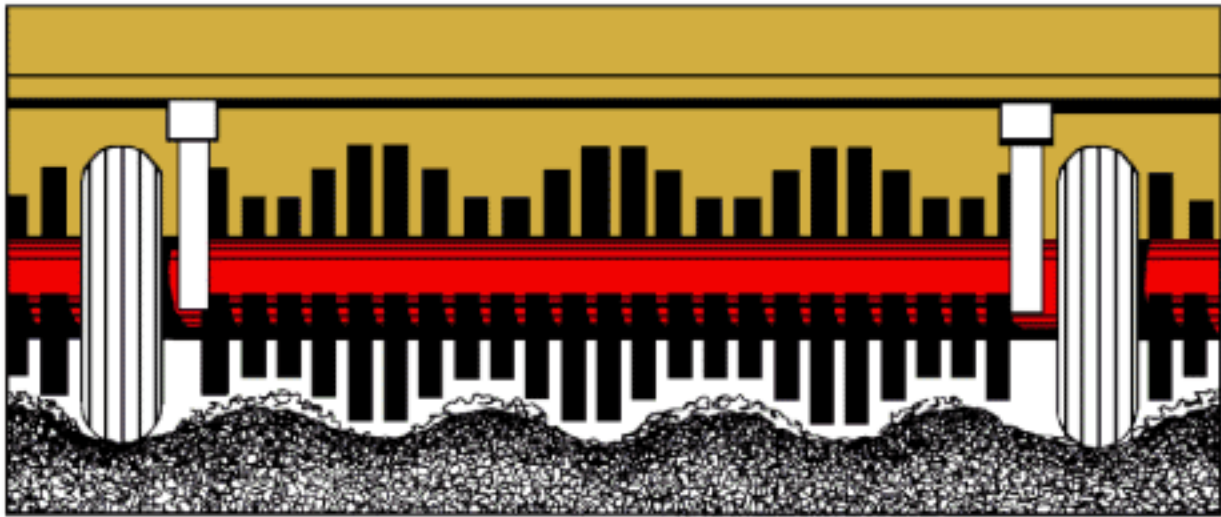


Contoured Rotor - For different row spacing and for a more precise cut on ridge till devining, an optional contour knife rotor is available on special request.



LARGE HEAVY DUTY ROTOR WITH CUPPED FLAILS .

CUPPED FLAILS

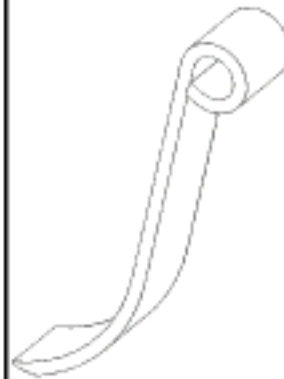


5/16" X 2" WIDTH.
5", 6-1/2", 8",
& 9-1/2" LENGTHS
FOR A VARIETY TO
MEET YOUR ROW
CONFIGURATIONS



Heavy Duty
2-3/16"
Alloy Shafting



HEAVY DUTY 200 HP GEARBOX

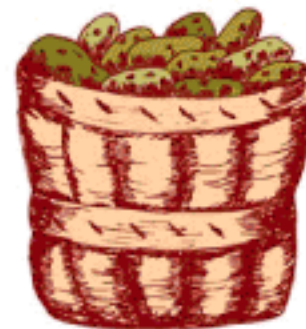


- NEWHOUSE POTATO SHREDDER -

THIS MULTI-CROP SHREDDER CAN HANDLE NEARLY ALL EXTREMELY TOUGH CROP CONDITIONS. IT COMES EQUIPPED WITH AN EXTRA HEAVY ROTOR. THESE SHREDDERS GIVE THE OPERATOR THE OPTION OF BUYING 3 DIFFERENT TYPES OF WHEEL LEG ASSEMBLIES: TIRE ROLLER, AS SEEN BELOW, RIGID WHEEL LEGS OR SWIVEL WHEEL LEGS, AS SEEN ON INSIDE PAGE OF THIS BROCHURE.



REAR VIEW WITH TIRE ROLLER ASSEMBLY

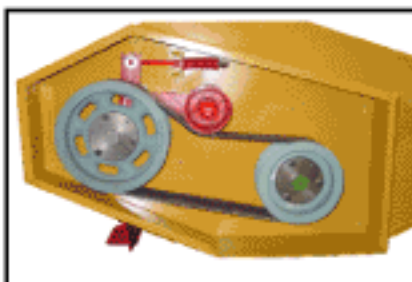

- BELT DRIVEN POWER TRAIN -

Spring loaded belt tensioner for constant belt tension with heavy duty cogged "C" belts. Heavy duty sheaves with taper lock bushings. Cover door is hinged.



The rubber tire roller has 2 or 3 (depending upon size of machine) adjustable mechanical linkages for adjusting to optimal height.

SPECIFICATIONS

MODEL	P1200	P1700	P1950
OVER ALL WIDTH	180-1/2"	229"	259-1/2"
CUTTING WIDTH	155"	210"	234"
CUTTING HEIGHT	4" TO 12"	4" TO 12"	4" TO 12"
PTO RPM	1000	1000	1000
APPROX O/A HEIGHT W/O JACKS & DEPTH WHEELS	29-1/2"	29-1/2"	29-1/2"
DEPTH W/O DEPTH WHEELS & 3-POINT HITCH	62-1/4"	62-1/4"	62-1/4"
NUMBER OF FLAILS	84	124	132
NUMBER OF DRIVE BELTS	4	6	6
GEAR BOX RATING	200 HP	200 HP	200 HP
APPROX. WEIGHT <small>(W/O 3-PT HITCH & WEIGHT FOR TIRE ROLLER)</small>	4000 LBS	4600 LBS	4900 LBS