

= Newhouse =

MINT SLUG SPREADER



- **LARGE CAPACITY** —————
- **FAST SPREADING** —————
- **BUILT TO LAST** —————
- **LOW PROFILE** —————

NEWHOUSE MFG. CO., INC.

1048 N. 6 TH ST. - REDMOND, OR 97756

PHONE 541-548-1055 FAX 541-548-4144

Web Site: www.newhouse-mfg.com

E-mail: info@newhouse-mfg.com



SCREEN WINDOW FOR VIEWING LOAD.



LARGE TRACTOR TIRES FOR EASY PULLING AND LESS GROUND COMPACTION.



BEATER DRIVE TRAIN SINGLE AND DOUBLE # 80 ROLLER CHAIN, SHIELDED BY HINGED CHAIN GUARD.




REPLACEABLE ALLOY STEEL BOLT-ON BEATER TEETH.




RIGHT ANGLE GEAR BOX DRIVEN BY 3, "B" BELTS WITH A SPRING LOADED TIGHTNER.



ADJUSTABLE SPEED CONTROL FOR FLOOR DRAG CHAINS.

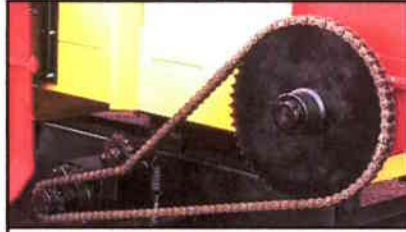

FLOOR DRAG DRIVE, # 80 ROLLER CHAIN WITH SPRING LOADED TIGHTENER AND HINGED CHAIN GUARD.

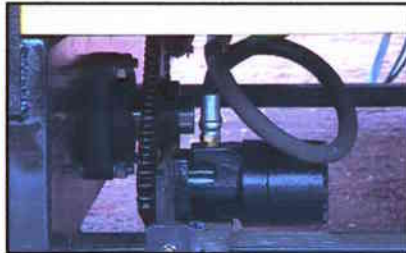

HIGH TORQUE HYDRAULIC MOTOR POWERS FLOOR CHAIN.



EXTRA INCLINE LADDER AND SCREW JACK.



2, PAIR OF D667X DRAG CHAINS CONSISTING OF CHANNEL FLIGHT BARS AND EACH STRAND OF CHAIN HAS ITS OWN ADJUSTMENT TAKE-UP FOR PROPER TENSION. 1/4" UHMW IS USED TO PREVENT WEAR AND FRICTION.



LOW PROFILE MAKES SIDES LOWER FOR COMFORTABLE E-Z FILLING WITH A LOADER.



AUGER BEATERS ARE WELDED TO HEAVY WALL TUBE WITH A 2" SOLID SHAFT RUNNING THE FULL LENGTH FOR EXTRA STRENGTH.



SPREADS EVEN AND FAST APPROXIMATELY 8 TO 10 MINUTES PER LOAD.



A LARGE CANADIAN FARM USING TWO NEWHOUSE SPREADERS.

SPECIFICATIONS

WEIGHT	APROX. 9000 LBS
DRAG CHAIN DRIVE SHAFT	2-7/16" ALLOY SHAFT
RIGHT ANGLE GEAR BOX	150 HP
P.T.O. DRIVE	1000 RPM.
WHEELS	2 @ 18" X 38"
TIRES	2 @ 18.4" X 38" TRACTOR
CLEVIS HITCH	CATEGORY 3
TRACTOR SIZE NEEDED	100HP OR MORE
SIDE HEIGHT FROM GROUND	101 INCHES
BOX SIZE, APPROX. (1048 CF)	W 104" X H 66" X L 264"
OVER ALL DIMENSIONS W/ TIRES	W 149" X H 114" X L 360"