

# **= Newhouse =**

**Mfg. Co. Inc. - Redmond, OR**

**HEAVY DUTY 15 & 18 FT.  
UNIVERSAL SHREDDER  
MODEL U1500 & U1800**



**REAR VIEW OF ADJUSTABLE DEPTH WHEEL TOOL BAR**

**NEWHOUSE MANUFACTURING COMPANY INC.  
1048 N. SIXTH STREET, REDMOND OR 97756  
PHONE: (541) 548-1055 FAX: (541) 548-4144  
WEB SITE: [www.newhouse-mfg.com](http://www.newhouse-mfg.com)  
E-mail: [info@newhouse-mfg.com](mailto:info@newhouse-mfg.com)**


**Tough Steel Construction :** Every part is built to withstand years of hard work. The Shredder hood is constructed of 1/4" steel, side panels of 5/16 plate, rotor 10-3/4" O.D. X 1/2" wall with 2-3/16" alloy shafting and triple seal bearings.



**BELT DRIVEN POWER TRAIN**  
Extra heavy duty spring loaded belt tensioner for constant belt tension with heavy duty banded "C" belts. Belt tensioner uses tapered roller bearings with adjustable alignment. Heavy duty sheaves with taper lock bushings. Cover door is hinged.



**Heavy Duty  
2-3/16"  
Alloy Shafting**

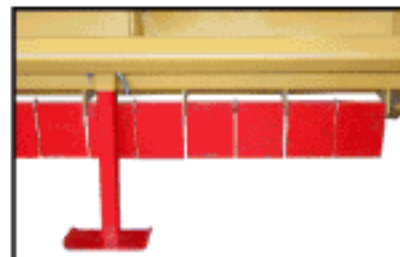

**NEW IMPROVED DEBRIS DE-  
FLECTOR FOR INDEPENDENT  
HINGED SAFETY FLAPPERS.**  
2 Jack Stands for storage and for safety purposes when working on Shredder.



Adjustable pull hitch, or 3 point hitch available. Optional bolt on clevis for pull type hitch. 1000 RPM PTO with overrunning clutch, available with or without a CV joint.



**HEAVY DUTY 5/8" X 2" FLAIL MOUNT  
BARS AND OVERLAPPING FLAIL PA-  
TERN.**

<b>SPECIFICATIONS</b>		
<b>MODEL</b>	<b>U1500</b>	<b>U1800</b>
OVERALL WIDTH	204"	240"
CUTTING WIDTH	180"	216"
PTO RPM	1000 RPM	1000 RPM
APPROX O/A HEIGHT W/O JACKS & WHEELS	39"	39"
DEPTH W/O DEPTH WHEELS & HITCH	64"	64"
NUMBER OF BANDED DRIVE BELTS / SIDE	1	1
NUMBER OF WHEELS RECOMMENDED	4	4
GEAR BOX RATING	200 HP	200 HP
FLAIL ROTOR RPM	1300/1600	1300/1600



**HEAVY DUTY 200 HP  
GEARBOX**